

07-20-00

A

PATENT APPLICATION

ATTORNEY DOCKET NO. 70990061-1

IN THE U.S. PATENT AND TRADEMARK OFFICE
Patent Application Transmittal Letter

jc714 U.S. PTO
09/18/05
07/18/00

ASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 CFR 1.53(b) is a(n): ☒ Utility ☐ Design

☒ original patent application,
☐ continuation-in-part application

INVENTOR(S): Khiam Yong TAN; Thiam Wah LOH; Teck Chye Allen LIM

TITLE: Clock Synchronization Circuit And Method

Enclosed are:

☒ The Declaration and Power of Attorney. ☒ signed ☐ unsigned or partially signed
☒ 5 sheets of drawings (one set) ☐ Associate Power of Attorney
☐ Form PTO-1449 ☐ Information Disclosure Statement and Form PTO-1449
☐ Priority document(s) ☐ (Other) (fee \$)

CLAIMS AS FILED BY OTHER THAN A SMALL ENTITY				
(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) TOTALS
TOTAL CLAIMS	16 — 20	0	X \$18	\$ 0
INDEPENDENT CLAIMS	2 — 3	0	X \$78	\$ 0
ANY MULTIPLE DEPENDENT CLAIMS	0		\$260	\$ 0
BASIC FEE: Design \$310.00); Utility \$690.00)				\$ 690
TOTAL FILING FEE				\$ 690
OTHER FEES				\$
TOTAL CHARGES TO DEPOSIT ACCOUNT				\$ 690

Charge \$ 690 to Deposit Account 08-2025. At any time during the pendency of this application, please charge any fees required or credit any over payment to Deposit Account 08-2025 pursuant to 37 CFR 1.25. Additionally please charge any fees to Deposit Account 08-2025 under 37 CFR 1.16, 1.17, 1.19, 1.20 and 1.21. A duplicate copy of this sheet is enclosed.

"Express Mail" label no. EL 519584024 U S

Date of Deposit 07/18/00

I hereby certify that this is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to: Assistant Commissioner for Patents, Washington, D.C. 20231.

By
Typed Name: Dee Timmons

Respectfully submitted,

Khiam Yong TAN; Thiam Wah LOH;

By

Edward Y. Wong

Attorney/Agent for Applicant(s)

Reg. No. 29,879

Date: June 02

Telephone No.: (650) 857-3873

CLOCK SYNCHRONIZATION CIRCUIT AND METHOD

Field of Invention

This invention relates to a clock signal synchronization circuit and
5 method. More particularly, this invention relates to a low-cost clock
synchronization circuit that can be implemented using elements in a
standard programmable gate-array (PGA).

Background

10 In digital circuits such as microprocessor circuits, a reference clock
signal is distributed throughout the circuits so as to control timing of events
within the circuits. In each circuit, the reference clock signal is typically
distributed from a single distribution point to various destination points within
the circuit. These destination points are at the clock-input pins of integrated
15 circuits (IC's) that receive the reference clock signal. The destination points
may be located at different distances from the distribution point. For reasons
which will be discussed later, the signals do not arrive at all these destination
points at exactly the same time. The difference in time between the arrivals
of the signals is called skew.

20 Typical paths for a clock signal will include fanout gates, circuit board
traces and IC interconnect metal. Each of these provides an opportunity for
introducing undesired clock skew. The amount of time it takes a signal to
travel along a circuit board trace is called the electrical length of the trace.
This electrical length depends upon the physical length and the capacitance
25 of the trace. All else being equal, a signal will take longer to travel a long
path than a short one. If the physical lengths of all the clock signal paths are
not equal, skew is introduced.

Clock signal paths will often include several levels of fanout gates and
buffering. If there are unequal numbers of gates in the signal paths or if
30 there are variations in the time it takes a signal to pass through a gate, skew

will occur. How long a signal takes to pass through a gate depends upon several factors, including the propagation delay characteristics of the particular type of gate, the number of loads the gate is driving, and the temperature of the gate. Any variation of these factors between two signal paths will cause skew in the signals. Even if these factors are identical, there may be variations between individual gates of the same type.

There are several reasons for attempting to eliminate as much skew as possible in a circuit. First, skew limits the speed at which a system can operate. Within a microprocessor circuit, tasks are often performed serially, with data being passed from one stage of the circuit to another on subsequent clock cycles. The time period of the clock must be long enough to account for the time it takes a stage to process the data and propagate it to the next stage. In addition, the clock period must also allow for any skew between the clock signals at the various stages. For example, if one stage is clocked late due to clock skew but the next stage is clocked on time, the data from the first stage may not yet be present when the second stage is clocked. The clock period thus must be stretched to accommodate not only the time needed for the first stage to process and propagate the data, but also for the amount of skew between the clock signals present at the two stages.

There are several techniques used in the attempt to reduce clock skew due to one or more of the conditions discussed above. A designer can attempt to equalize the circuit board trace lengths between the clock source and all destinations. This technique is often accomplished by distributing the clock signals radially from a distribution point physically located near the center of the circuit board. The designer can also equalize the number of gates and types of gates in all clock signal paths. Clock skew can also be reduced by equalizing the amount of load that gates and various signal paths must drive. Since these techniques affect the fundamental architecture of the system, they can only be performed during the design of

the system. Such techniques cannot account for design changes or component variations. This equalizing technique may not be possible in all circumstances due to other design constraints of the circuit. Additionally, a previously equalized circuit may require the addition of new circuitry not conceived of during the initial design phase. Previously equalized paths may no longer be equalized after the addition of new circuitry.

There are also delay introduction techniques that can be performed during the manufacture or installation of the system. What is important is the difference in delay between the various signal paths, not the actual amount of delay in any given path. Thus, skew between signals can be compensated for by introducing a specific amount of delay in the faster signal paths so as to match the electrical length of the slowest signal path. Delay line tuning involves connecting a clock signal path through a delay line that provides multiple outputs, each output corresponding to a different delay amount. The output corresponding to the needed delay is selected at the time of installation by reference to other clock signal paths. Delay line tuning is adjustable, so it can skew compensate a circuit even after the addition of new circuitry.

These equalizing and delay introduction techniques are useful for large and complex systems that span several system modules. These methods are overkill for small systems wherein skew is introduced mostly due to excessive loading of a reference clock source. In these systems, commercially available phase-locked loop (PLL) circuits can be used to reduce skew. Although these PLLs are accurate and are capable of driving large loads, they are costly and when included in a design, occupies precious printed circuit board space. These PLLs also increases the power consumption of the system.

The prior art therefore creates the need for a low-cost clock synchronization circuit and method for producing an output clock signal that is in synchronization with a reference clock signal.

Summary

According to a preferred embodiment of the present invention, a clock synchronization circuit for generating an output clock signal that is substantially in synchronization with a reference clock signal has a programmable delay element and a phase detector. The programmable delay element and the phase detector is preferably implemented using elements in a PGA. The condition of substantial synchronization is reached when the phase difference between the two clock signals is less than a value predetermined during a design stage of the circuit. The programmable delay element is coupled to the reference clock signal for introducing an adjustable delay in the reference clock signal to produce a delay-adjusted delayed output clock signal. By increasing the adjustable delay, the delay-adjusted output clock signal becomes increasingly closer to being in synchronization with the reference clock signal. The phase detector is coupled to the reference clock signal and the delay-adjusted delayed output clock signal for detecting the phase difference between the two clock signals. The adjustable delay is increased until the synchronization condition is reached.

According to another aspect of the invention, a method for generating a delayed output clock signal that is in synchronization with a reference clock signal involves inverting and delaying the reference clock signal by a first delay to produce an intermediate clock signal. This intermediate clock signal cooperates with the reference clock signal to provide a window of width equal to the predetermined delay. The method next introduces an adjustable delay in the intermediate clock signal to produce a delay-adjusted delayed output clock signal. The method also inverts and delays the delay-adjusted delayed output clock signal by a second predetermined delay Y to produce a reference clock signal delayed by the first delay and the second predetermined delay Y. The method increases the adjustable delay to bring a cycle of the delay-adjusted delayed output clock signal to be increasingly

in synchronization with a subsequent cycle of the reference clock signal. The adjustable delay is increased until a mark of the reference clock signal delayed by the first delay and the second predetermined delay Y appears in the window. When such a condition is reached, the delay-adjusted delayed output clock signal leads the reference clock signal by a known phase difference X that is equal to the second predetermined delay Y.

Brief Description of Drawings

The invention will be better understood with reference to the drawings, in which:

Figure 1 is a block diagram showing clock destinations at various distances from a microprocessor clock source.

Figure 2 is a timing diagram showing clock skew between signals at a reference clock and a destination point.

Figure 3 is a block diagram showing a clock synchronization circuit according to a preferred embodiment of the present invention. The clock synchronization circuit is shown in the context of a typical microprocessor circuit for providing a synchronized clock signal to various ICs in the circuit.

Figure 4 is a detailed schematic of the clock synchronization circuit in Figure 3. The clock synchronization circuit has a programmable delay element and a phase detector. The phase detector has a pulse generator and a latch.

Figure 5A is a timing diagram showing waveforms at various selected points of the schematic in Figure 4. This diagram shows a reference clock signal, CLK, and a delay-adjusted delayed output clock signal, BCLK, during power up of the circuit of Figure 4 when the programmable delay element has zero delay.

Figure 5B is a timing diagram similar to Figure 5A showing the delay-adjusted delayed output clock signal, BCLK, delayed by a delay of AD1 for

bringing it closer to being in synchronization with the reference clock signal, CLK.

Figure 5C is a timing diagram showing the delayed-adjusted delayed output clock signal, BCLK, which is delay-adjusted by a delay AD2 to bring it even closer to being in synchronization with the reference clock signal, CLK. A pulse is shown generated by the pulse generator in Figure 4. The pulse width of the generated pulse is insufficient to trigger the latch in Figure 3.

Figure 5D is a timing diagram showing the delay-adjusted delayed output clock signal, BCLK, which is substantially in synchronization with the reference clock signal, CLK. The pulse width of the generated pulse in Figure 5C has increased and is sufficiently large to trigger the latch. A signal, STATUS, at the output of the latch is appropriately changed to indicate the synchronization condition.

Figure 5E is a timing diagram similar to Figure 5D showing that if the adjustable delay is continuously increased, there will come a point in time when the pulse generated is at its maximum width.

Figure 5F is a timing diagram showing a diminishing pulse width of the generated pulse with further increase in delay of the reference clock signal, CLK.

Figure 6 is a block diagram similar to Figure 4 showing an alternative embodiment of the present invention.

Detailed Description of the Preferred Embodiment

Figure 1 is a block diagram showing a clock generator, such as a microprocessor 2 supplying a reference clock signal to three destination integrated circuits (IC's) 4. The connections 6 that carry the reference clock signal between the microprocessor 2 and the destination IC's 4 are shown to be of different lengths. Figure 2 is a timing diagram showing the relationship between the reference clock signals at the microprocessor 2 and one of the destination IC's 4. The reference clock signal is a periodic waveform having

a period $2W$. The waveform of the reference clock signal arriving at any one of the IC's 4 is shown to have a skew 12 that is caused mainly by overloading the clock source in the microprocessor 2. In this example, the signals do not arrive at the destinations at exactly the same time due to the difference in length of the connections 6. However, the difference in time of arrival is negligible compared to the skew 12 caused by overloading the clock source.

Hereafter a preferred embodiment of the invention is described in the context of components or elements available in a programmable gate array (PGA) such as the UPD65845S1-Y07-2C from NEC. However, it should be recognized that other types of IC's and PGAs could be used to practice the current invention.

Figure 3 is a block diagram showing a clock synchronization circuit 14 used in a microprocessor system similar to that shown in Figure 1 for reducing skew 12. The clock synchronization circuit 14 has a reference clock signal 16 from a microprocessor 2 as an input to the circuit 14. The clock synchronization circuit 14 introduces an adjustable delay in the reference clock signal 16 to produce a delay-adjusted delayed output clock signal 18. As the adjustable delay is increased, the output clock signal 18 is progressively brought into synchronization with the reference clock signal 16. Such a synchronization of the signals is achieved when a cycle of the reference clock signal 16 is delayed to become synchronized with a subsequent cycle of the reference clock signal 16. In this substantially synchronized state, the two signals 16, 18 have a predetermined phase difference. This phase difference is predetermined by the propagation delay times of elements used in the design of the clock synchronization circuit 14. This predetermined phase difference should be within that tolerable for synchronously clocking the IC's 4 so that data 20 and control 22 signals are exchanged at the correct instances. This phase difference is typically equivalent to a delay of several nanoseconds.

Hereafter, the delay-adjusted output clock signal 18 will be referred to as the output clock signal 18 for ease of description. The clock synchronization circuit 14 is next described with the aid of Figure 4. Figure 4 is the schematic diagram of a clock synchronization circuit 14 according to the preferred embodiment of the present invention. The circuit 14 has two main blocks, a programmable delay element 24 and a phase detector 26. One of the inputs to the phase detector 26 is the reference clock signal 16. The output clock signal 18 is fed back, preferably through a circuit trace outside of the PGA, into the clock synchronization circuit 14 as a second input to the phase detector 26. Preferably, the phase detector 26 has a pulse generator 28 and a latch, such as a D-latch 30. The output of the pulse generator 28 is a train of pulses that are used to clock the D-latch 30. When the pulse width of a pulse exceeds a pulse width Z that is required to clock the D-latch 30, the D-latch 30 will trigger to indicate the substantially synchronized state of the reference clock signal 16 and the output clock signal 18. If the phase difference between the clock signals 16, 18 is greater than the predetermined phase difference, the programmable delay element 24 is appropriately programmed to increase the adjustable delay in the reference clock signal 16.

The known delays of elements in the PGA allows a designer to design a clock synchronization circuit 14 that produces an output clock signal 18 that has a known phase difference with the reference clock signal 16 when brought into a substantially synchronized state. There are many different types of elements with different delay times in a PGA. These elements make the PGA suitable for implementing the clock synchronization circuit 14. PGAs are commonly used in electronic and microprocessor circuits for reducing the chip count in the circuits. If a PGA is available, the clock synchronization circuit 14 can be implemented without adding more components.

In the clock synchronization circuit 14, the reference clock signal 16, CLK, is electrically coupled to a first NOT gate 40 of the pulse generator 28 to produce an intermediate clock signal. This first NOT gate 40 has a delay of Y. The output of this first NOT gate 40 is electrically coupled to a delay element 42 having a delay of D. The output of the NOT gate 40 is also electrically coupled to the programmable delay element 24. The implementation of such a programmable delay element 24 in a PGA is well known to those skilled in the art. The adjustable delay of this programmable delay element 24 is preferably incremented by D each time it is incremented, where D is the propagation delay of a delay element in the PGA. This programmable delay element 24 is coupled to and controlled by a microprocessor 2 to allow the microprocessor 2 to increment the adjustable delay. The output of the programmable delay element 24 is electrically coupled to the input of a second NOT gate 44 that also preferably has a delay of Y. The output of this second NOT gate 44, the reference clock signal 16 and the output of the delay element 42 are connected to a first, a second and a third input of a three-input AND gate 46 respectively. The output of the AND gate 46 is electrically coupled to the D-latch 30 to clock the D-latch 30. A D-input 48 (data input) of the D-latch is kept at a logic high level by electrically coupling it to a supply voltage, Vcc. An S-input (set input) of the D-latch 30 is electrically coupled to logic low level, GND. An R-input (reset input) of the D-latch 30 is electrically coupled to a reset signal 50 such as one generated by the microprocessor 2. A Q-output of the D-latch 30 is electrically coupled to an input pin of the microprocessor 2 for the microprocessor 2 to read the state of this Q-output.

Next the operation of the clock synchronization circuit 14 is described with the aid of timing diagrams in Figures 5A-5F. The reference clock signal 16, CLK, is shown to have a fifty-percent duty. Clock signals of other suitable duty cycles are equally applicable to the present invention. Figure 5A shows the waveforms of selected signals at various points in the clock

synchronization circuit 14 during the powering up of the circuit 14. The adjustable delay of the programmable delay element 24 is set at zero delay. The reference clock signal 16 propagates through the first NOT gate 40 and the delay element 42 to arrive at the third input, IN3, of the AND gate 46

5 inverted and delayed by $Y+D$ nanoseconds. With the adjustable delay set at zero delay, the input to the second NOT gate 44 is the output clock signal 18, BCLK, which is also the reference clock signal 16, CLK, inverted and delayed by Y . Accordingly, the output of the second NOT gate 44 is the reference clock signal 16 delayed by $2Y$ as indicated by the waveform IN1 in

10 Figure 5A. During power up, the microprocessor 2 will perform a synchronization sequence by first resetting the D-latch 30 so that the Q-output of the D-latch 30 is at a logic low level to indicate that synchronization is not reached. At this point, the output of the AND gate, P, is at a logic low level. This logic low level when presented at a C-input (clock input) of the D-

15 latch 30 will not cause any change in the Q-output of the D-latch 30.

To understand the waveforms of the signals in Figures 5A-5F, it is worth noting that the reference clock signal 16, CLK, (connected to IN2 of the AND gate 46) and the signal at the third input of the NAND gate, IN3, are in fixed phase relationship with each other. That is, the signal at IN3 is the

20 reference clock signal 16 inverted and delayed by $Y+D$. The ANDing of the signals at IN2 and IN3 basically opens up a window of width $Y+D$. Similarly, the BCLK signal 18 and the signal at the first input, IN1, of the AND gate 46 are also in fixed phase relationship with each other. As the adjustable delay of the programmable delay element 24 is increased, the second pair of

25 signals, BCLK and IN1 will shift to the right of Figure 5A so that the output clock signal 18, BCLK, will progressively become synchronized with the reference clock signal 16, CLK.

In the synchronization sequence, the microprocessor 2 next proceeds to increase the adjustable delay by D . After the adjustable delay is

30 incremented, the microprocessor polls the Q-output of the D-latch 30 for a

change in logic state of the Q-output. If there is no change in the Q-output, i.e. it is still at a logic low level, the microprocessor 2 will repeat the above steps of incrementing the adjustable delay and polling the Q-output for a change in state.

5 As the adjustable delay is incremented to a value of AD1, the waveforms of the signals will be that shown in Figure 5B. At this point, a trailing edge 32 of a mark of a cycle of the signal at IN1 coincides with the edge of the window. If such a condition is detectable, the output clock signal 18, BCLK, is known to lead the reference clock signal 16, CLK, by a phase
10 difference corresponding to the delay Y. However, in this preferred embodiment, such a condition is not detectable at this particular point in time. No pulse appears at the output of the AND gate 46 when at least one of the three inputs of the AND gate 46 is at a logic low level.

 Beyond this point as the adjustable delay is further incremented to a
15 value of AD2, a pulse 60 begins to appear in the window at the output of the AND gate 46. Figure 5C shows a pulse generated by the pulse generator 28. The width of this pulse 60 is given by $Y-X$, where X is the phase difference between the output clock signal 18, BCLK, and the reference clock signal 16, CLK. As long as $Y-X$ is less than a minimum pulse width Z required to
20 clock the D-latch 30 for triggering the D-latch 30, the Q-output will not change state and will remain at a logic low level. As the delay adjustment is further increased to a value of AD3, the phase difference X decreases and the pulse width given by $Y-X$ increases. As soon as $Y-X$ is greater than Z , the D-latch 30 will trigger to cause the Q-output of the D-latch 30 to follow
25 the logic state of the D-input 48 to go to a logic high level. Figure 5D shows the waveforms of the signals when such a condition is reached. On detecting this condition, the microprocessor 2 recognizes that the reference clock signal 16, CLK, and the output clock signal 18, BCLK, are substantially in synchronization with a phase difference between the two signals of no more
30 than $Y-Z$. Therefore, with the proper selection of the values of delay Y and

pulse width Z, a designer is able to predetermine the phase difference when synchronization occurs.

If Y is larger than Z, the output clock signal 18, BCLK, will lead the reference clock signal 16, CLK, by Y-Z as described above. The worst case
 5 phase lead will be given by $Y_{\max} - Z_{\min}$, where Y_{\max} is the maximum delay of the second NOT gate 44 and Z_{\min} is the minimum pulse width required to clock the D-latch 30.

Next the condition when both the output clock signal 18, BCLK, and the reference clock signal 16, CLK, are exactly in phase or synchronized but
 10 the generated pulse 60 is still of insufficient width to trigger the D-latch 30 is discussed. That is, when X is equal to zero but Y is still less than Z. With further increase in the adjustable delay, the output clock signal 18, BCLK, will begin to lag the reference clock signal 16, CLK. The width of the generated pulse 60 will also increase until it reaches a maximum determined
 15 by the window width of Y+D. Figure 5E shows the waveforms at the various points when the pulse width is at such a maximum of Y+D. This maximum pulse width should trigger the D-latch 30, otherwise the clock synchronization circuit 14 will not work. The phase difference between the two clock signals 16, 18, now given by Y+X, should preferably be greater
 20 than Z before the pulse width is allowed to increase to Y+D. Accordingly, $Z_{\max} - Y_{\min}$ gives the worst-case phase lag. The window width given by Y+D should be able to accommodate a pulse of width Z_{\max} . The worst-case phase lead and phase lag define the bounds of the phase difference between the output clock signal 18, BCLK, and the reference clock signal
 25 16, CLK. If the values of Y and Z allows the phase difference to be more accurately determined, the delay of the programmable delay element 24 can be appropriately adjusted to bring the two clock signals closer into synchronization.

After detecting the Q-output signal has changed state to a logic high level, the microprocessor 2 exits the synchronization sequence and proceeds with its normal operation.

Although the following condition will not occur if the Y, Z and D values
 5 are properly selected, it is worth understanding how the clock
 synchronization circuit 14 behaves if the adjustable delay is incremented
 without the D-latch 30 being triggered. Figure 5F shows a generated pulse
 whose width is reduced if the adjustable delay is allowed to increase in such
 a manner. As the adjustable delay is increased, the pair of signals, BCLK
 10 and IN1 will shift further to the right, away from the pair of signals, CLK and
 IN3. The width of the generated pulse will initially remain at its maximum
 width of Y+D. However, there will come a point when the width of the
 generated pulse 60 will begin to reduce in width and eventually disappear.
 Therefore, it is important to select the values of Y, Z and D so that the D-
 15 latch 30 is triggered.

The clock synchronization circuit 14 described above demonstrates
 that a simple low-cost circuit can be used to generate a delayed clock signal
 18 that is substantially in synchronization with a reference clock signal 16
 from a microprocessor 2.

20 It should not be construed that the invention is limited to the particular
 embodiment discussed. The invention can be practiced with other circuits.
 For example, the programmable delay element 24 may be controlled by an
 up-counter 62 instead of by the microprocessor 2. Figure 7 shows such an
 alternative embodiment. The ORing of the Q-output and the reference clock
 25 signal 16, CLK, can be used to clock the up-counter 62. The same reset
 signal 50 that is used to clear the D-latch 30 in the preferred embodiment
 can also be used to clear the up-counter 62 at the start of a synchronization
 sequence. Using such a circuit, no microprocessor intervention is required
 to increase the adjustable delay. The up-counter 62 will automatically count
 30 up with each cycle of the reference clock signal 16, CLK, until the Q-output

Attorney Docket No.: 70990061-1

Claims

We claim:

1. A clock synchronization circuit for generating an output clock signal that is substantially in synchronization with a reference clock signal when in an in-synchronization state with a phase difference between the two clock signals of less than a predetermined value, the clock synchronization circuit comprising:
 - a programmable delay element coupled to the reference clock signal for introducing an adjustable delay in the reference clock signal to produce a delay-adjusted delayed output clock signal that becomes increasingly closer to being in synchronization with the reference clock signal; and
 - a phase detector coupled to the reference clock signal and the delay-adjusted delayed output clock signal for detecting the phase difference between the two clock signals and for generating an in-synchronization signal when the in-synchronization state is reached.
2. A clock synchronization circuit according to Claim 1; wherein the in-synchronization signal is a pulse having a pulse width sufficient to interrupt a microprocessor.
3. A clock synchronization circuit according to Claim 1; wherein the phase detector comprises:
 - a pulse generator that produces a pulse of variable width when the output clock signal approaches the in-synchronization state as the adjustable delay is increased; and
 - a latch that is triggered by the pulse to generate the in-synchronization signal when the width of the pulse reaches a pulse width Z required to trigger the latch.

1 4. A clock synchronization circuit according to Claim 3; wherein the latch
2 is a D-type latch.

3
4 5. A clock synchronization circuit according to Claim 3; wherein the pulse
5 generator comprises:

6 means for producing a window of a known width Y that is at
7 least equal to the pulse width Z; and

8 means for generating a signal (IN1) from the delay-adjusted
9 delayed output clock signal whose mark of a cycle is brought to overlap
10 with the window when the adjustable delay is increased to produce the
11 pulse.

12
13 6. A clock synchronization circuit according to Claim 5; wherein the
14 means for producing the window is a three-input AND gate having a first input
15 coupled to the reference clock signal, a second input coupled to an inverted
16 reference clock signal that is delayed by Y and the third input is coupled to the
17 reference clock signal delayed substantially by 2Y.

18
19 7. A clock synchronization circuit according to Claim 6; wherein the in-
20 synchronization state is reached when the pulse width reaches a width Y-X
21 that is equal to the pulse width Z; whereby the in-synchronization signal is
22 generated.

23
24 8. A clock synchronization circuit according to Claim 6; wherein the
25 second input of the three-input AND gate is coupled to an inverted reference
26 clock signal that is delayed by Y+D whereby D is a delay provided by a delay
27 element.

28
29 9. A clock synchronization circuit according to Claim 8; wherein the
30 bounds of the phase difference X is given by a worst case phase lead of
31 $Y_{\max} - Z_{\min}$ and a worst case phase lag of $Y_{\min} - Z_{\max}$ depending on the
32 values of Y and Z, wherein

Ymax and Ymin are the maximum and minimum delays of a NOT gate respectively; and

Zmax and Zmin are the maximum and minimum pulse widths required to trigger the latch respectively.

10. A clock synchronization circuit according to Claim 1; wherein the clock synchronization circuit is implemented in a programmable gate array.

11. A clock synchronization circuit according to Claim 8; wherein the delay-adjusted output clock signal is carried on a trace on a printed circuit board on which the programmable gate array is mounted.

12. A method of generating a delayed output clock signal that is substantially in synchronization with a reference clock signal when the delayed output clock signal has a predetermined phase difference X with the reference clock signal, the method comprising:

inverting and delaying by a first delay the reference clock signal to produce an intermediate clock signal, wherein this intermediate clock signal cooperates with the reference clock signal to provide a window of width equal to the predetermined delay;

introducing an adjustable delay in the intermediate clock signal to produce a delay-adjusted delayed output clock signal;

inverting and delaying by a second predetermined delay Y the delay-adjusted delayed output clock signal to produce a reference clock signal delayed by the first delay and the second predetermined delay Y;

increasing the adjustable delay to bring a cycle of the delay-adjusted delayed output clock signal to be increasingly in synchronization with a subsequent cycle of the reference clock signal until a synchronization condition is reached where a mark of a cycle of the reference clock signal delayed by the first delay and the second predetermined delay Y appears in the window to indicate that the

1 delay-adjusted delayed output clock signal leads the reference clock
2 signal by the phase difference X that is equal to the second
3 predetermined delay Y.
4

5 13. A method according to Claim 12; wherein increasing the adjustable
6 delay comprises increasing the adjustable delay by a known delay step D
7 each time the adjustable delay is incremented.
8

9 14. A method according to Claim 13; further comprising increasing the
10 delay by a further number of delay steps corresponding to Y/D to bring the
11 delayed-adjusted delayed output clock signal to be more in synchronization
12 with the reference clock signal after the synchronization condition is reached.
13

14 15. A method according to Claim 12; wherein increasing the adjustable
15 delay comprises increasing the adjustable delay until a portion of the mark
16 corresponding to a width of Z appears in the window; whereby the delay-
17 adjusted delayed output clock signal leads the reference clock signal by a
18 phase difference X that is equal to the second predetermined delay Y minus
19 the width Z.
20

21 16. A method according to Claim 13; wherein Y is smaller than Z and the
22 first delay is greater than Z and wherein increasing the adjustable delay
23 comprises increasing the adjustable delay until a portion of the mark
24 corresponding to a width of Z appears in the window; whereby the delay-
25 adjusted delayed output clock signal lags the reference clock signal by a
26 phase difference X that is equal to the width Z minus the second
27 predetermined delay Y.

CLOCK SYNCHRONIZATION CIRCUIT AND METHOD

Abstract

5

A clock synchronization circuit for generating an output clock signal that is in synchronization with a reference clock signal and a method embodying the principle of operation of the circuit are disclosed. The circuit has a programmable delay element and a phase detector. Synchronization is reached when the phase difference between the two clock signals is less than a predetermined value. The programmable delay element is coupled to the reference clock signal for introducing an adjustable delay in the reference clock signal to produce the output clock signal. By increasing the adjustable delay, the output clock signal becomes increasingly closer to being in synchronization with the reference clock signal. The phase detector is coupled to the reference clock signal and the output clock signal for detecting the phase difference between the two clock signals. The adjustable delay is increased until synchronization is obtained.

20



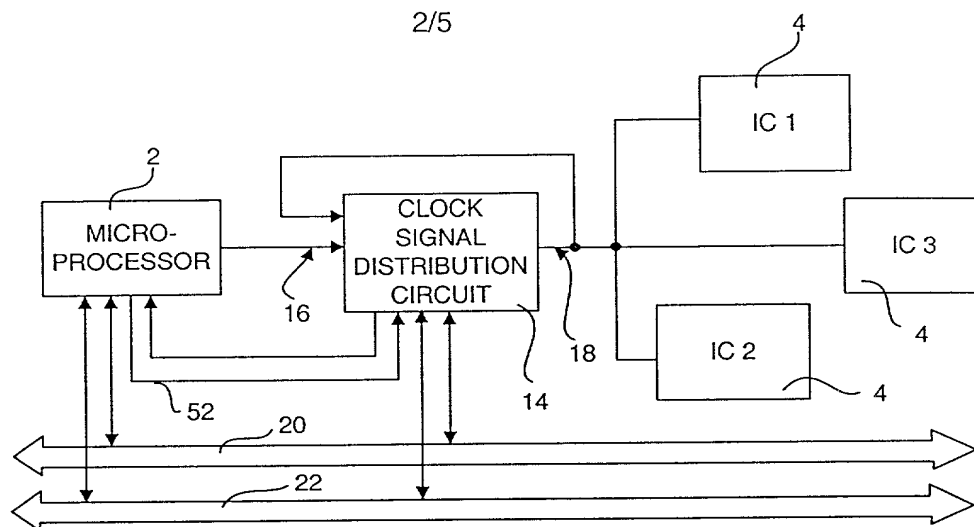


FIGURE 3

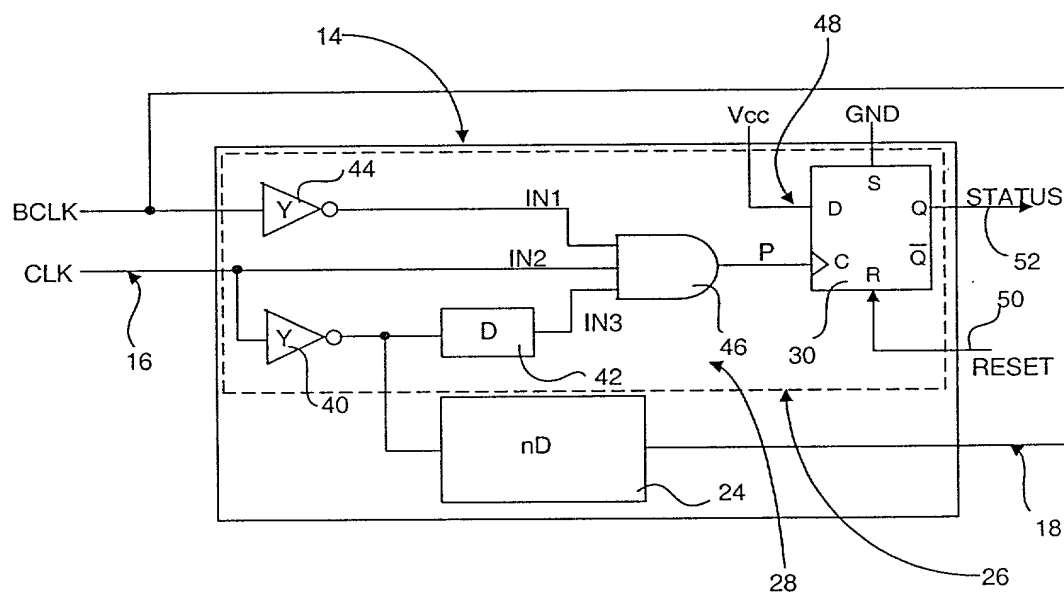


FIGURE 4





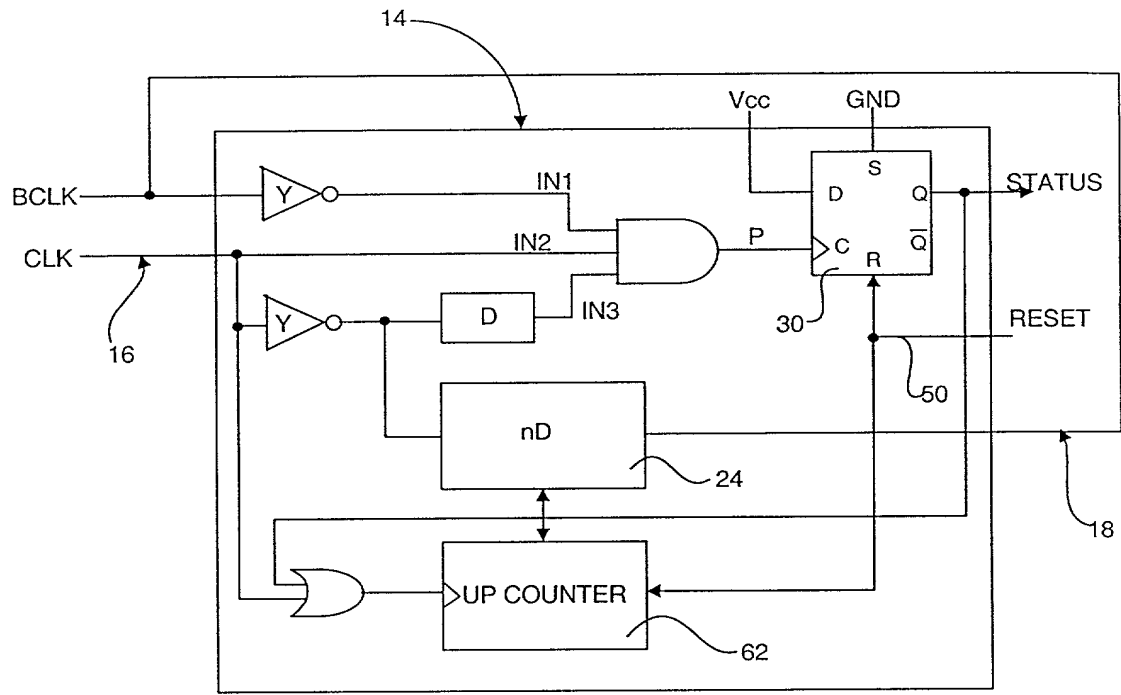


FIGURE 6

**DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION**
ATTORNEY DOCKET NO. 70990061-1

As a below named inventor, I hereby declare that:

My residence/post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Clock Synchronization Circuit And Method

the specification of which is attached hereto unless the following box is checked:

() was filed on _____ as US Application Serial No. or PCT International Application Number _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understood the contents of the above-identified specification, including the claims, as amended by any amendment(s) referred to above. I acknowledge the duty to disclose all information which is material to patentability as defined in 37 CFR 1.56.

Foreign Application(s) and/or Claim of Foreign Priority

I hereby claim foreign priority benefits under Title 35, United States Code Section 119 of any foreign application(s) for patent or inventor(s) certificate listed below and have also identified below any foreign application for patent or inventor(s) certificate having a filing date before that of the application on which priority is claimed:

COUNTRY	APPLICATION NUMBER	DATE FILED	PRIORITY CLAIMED UNDER 35 U.S.C. 119
			YES: _____ NO: _____
			YES: _____ NO: _____

Provisional Application

I hereby claim the benefit under Title 35, United States Code Section 119(e) of any United States provisional application(s) listed below:

APPLICATION SERIAL NUMBER	FILING DATE

U. S. Priority Claim

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION SERIAL NUMBER	FILING DATE	STATUS (patented/pending/abandoned)

POWER OF ATTORNEY:

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Customer Number **022879**Place Customer
Number Bar Code
Label here

Send Correspondence to:
HEWLETT-PACKARD COMPANY
Intellectual Property Administration
P.O. Box 272400
Fort Collins, Colorado 80528-9599

Direct Telephone Calls To:

Edward Y. Wong
(650) 857-3873

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Inventor: Kham Yong TAN Citizenship: SingaporeResidence: Blk 643, Bedok Reservoir Road, #13-83, Singapore 410643Post Office Address: Same as residence

Inventor's Signature

Date

30 May 00

DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION (continued)

ATTORNEY DOCKET NO. 70990061-1

Full Name of # 2 joint inventor: Thiam Wah LOH Citizenship: Malaysia
Residence: Blk 336, Clementi Ave 2, #08-336, Singapore 120336
Post Office Address: Same as residence
Inventor's Signature: [Signature] Date: 6/2/2000

Full Name of # 3 joint inventor: Teck Chye Allen LIM Citizenship: Singapore
Residence: 24 Cheng Soon Crescent, Singapore 599896
Post Office Address: Same as residence
Inventor's Signature: [Signature] Date: 30/5/2000

Full Name of # 4 joint inventor: _____ Citizenship: _____
Residence: _____
Post Office Address: _____
Inventor's Signature _____ Date _____

Full Name of # 5 joint inventor: _____ Citizenship: _____
Residence: _____
Post Office Address: _____
Inventor's Signature _____ Date _____

Full Name of # 6 joint inventor: _____ Citizenship: _____
Residence: _____
Post Office Address: _____
Inventor's Signature _____ Date _____

Full Name of # 7 joint inventor: _____ Citizenship: _____
Residence: _____
Post Office Address: _____
Inventor's Signature _____ Date _____

Full Name of # 8 joint inventor: _____ Citizenship: _____
Residence: _____
Post Office Address: _____
Inventor's Signature _____ Date _____